

# Manuel d'installation et de maintenance (serrures LRCE)

## Manuel comprenant :


Serrure électrique compacte à sécurité positive à percussion centrale ou latérale : . . . . .	page 1
Caractéristiques techniques - Utilisations : . . . . .	page 2
Contacts (pré-cablage) : . . . . .	page 3
Principe d'installation (RCD180) : . . . . .	page 4
Accessoires : . . . . .	page 5
Attestation de conformité : . . . . .	page . . .

# Serrure LRCE

## Serrure électrique compacte à sécurité positive à percussion centrale ou latérale



### Version à percussion centrale

réf : LRCE-PEC/ED

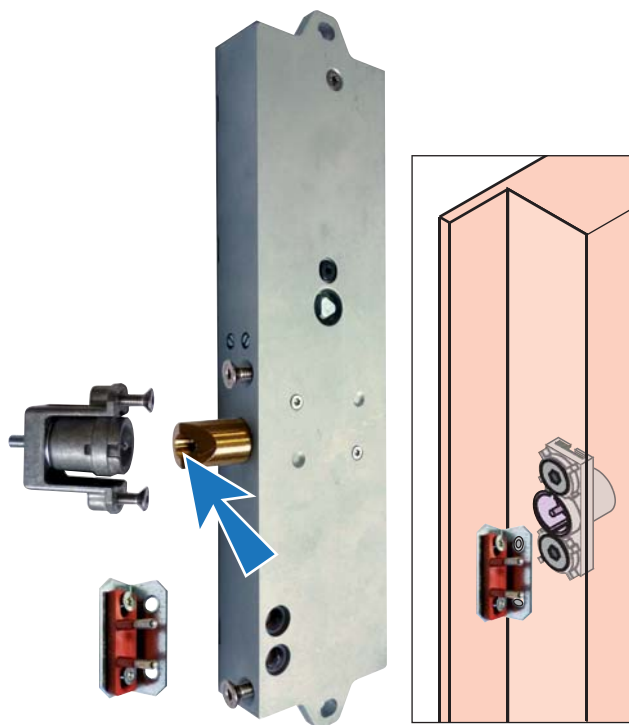

### Version à percussion latérale

réf : LRCE-PEL/ED

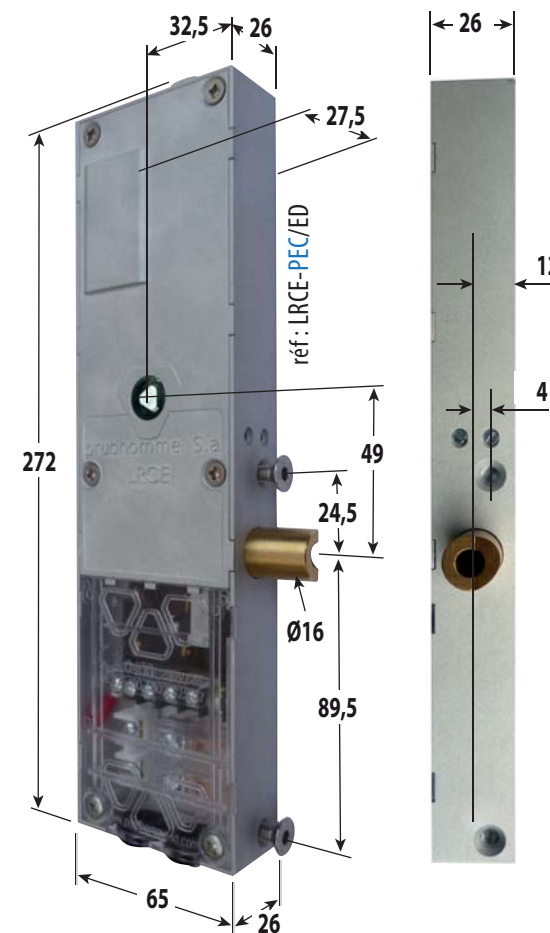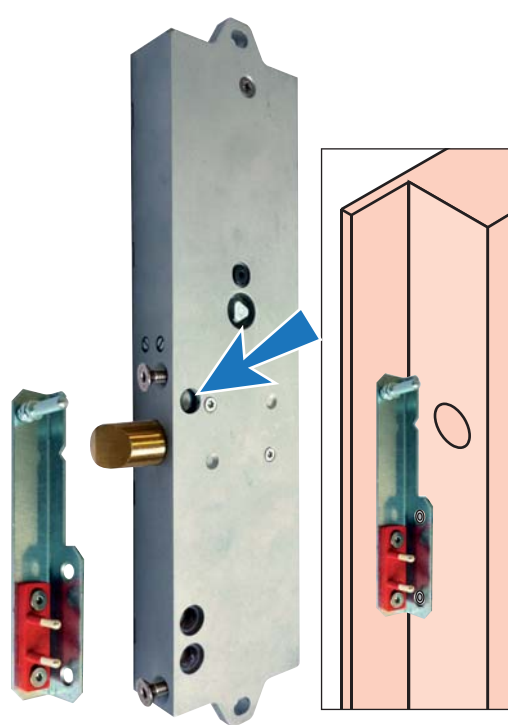

# Serrures LRCE

## Caractéristiques techniques - Utilisations

Il s'agit d'une serrure électrique silencieuse, à très faible courant et couple élevé, entraînée par un moteur pas à pas électrique issue de l'industrie de la robotique.

### Instruction d'utilisation

#### Electrique :

1. La tension d'alimentation doit être du type courant continu (DC).
2. La serrure est protégé en cas d'inversion de polarité lors du branchement.
3. La serrure est protégé en cas de surtension d'alimentation jusqu'à 60 volts DC (ou 40V AC).

#### Sécurité :

1. En cas de blocage du pêne:
  - . La serrure effectuera 3 cycles consécutifs de déverrouillage associé a un couple plus important.
  - . Si le pêne reste toujours bloqué pour une raison externe, la serrure se mettra en sécurité.
  - . Pour réarmer le cycle de déverrouillage, il suffit de couper et remettre l'alimentation.

#### Homologation

Ce composant a obtenu l'attestation d'examen CE de type N° : NL 16-400-1002-125-07.

#### Etanchéité

Sur demande, la serrure LRC E peut être fournie en étanche IP54.

#### Taille compacte

- 65 mm de large.
- 26 mm d'épaisseur (27,5 mm avec un léger bossage).

#### Silencieuse

#### Mécanisme d'entraînement :

- Puissant moteur pas à pas professionnel issue de la robotique.
- Gestion par micro contrôleur.
- Mécanisme d'entraînement directe à pignon.

#### Caractéristiques de sécurité :

- Détection de fin de course avec algorithme de récupération rapide

#### Maintenance

Aucune.

#### Energie :

- Tension disponible : 12 Vdc - 24 Vdc - 48 Vdc
- Très faible consommation d'énergie
- Courant de traction < 0,85 A
- Courant de maintien < 0,20 A

#### Caractéristiques techniques :

Tension nominale (dc)	12 V	24 V	48 V
Tension maximale d'utilisation	18 V	36 V	55 V
Tension minimale d'utilisation	10,8 V	18 V	36 V
Intensité d'appel	0,85 A	0,45 A	0,3 A
Intensité de maintien	200 mA	150 mA	150 mA

Température de fonctionnement	-25°C à + 70°C
Température de stockage	-40°C à + 80°C
Temps de déverrouillage	≈ 300 ms
Cyclage maximum	240 / heure
Masse	1,37 Kg
Indice de protection	IP41 (option IP54)




# Serrures LRCE

## Contacts (Pré-cablage)

### Serrure Droite :

face a la fenêtre de la serrure,  
le pêne est sur le coté droit  
(la disposition des contacts et  
des câbles est inverse pour la  
serrure gauche).

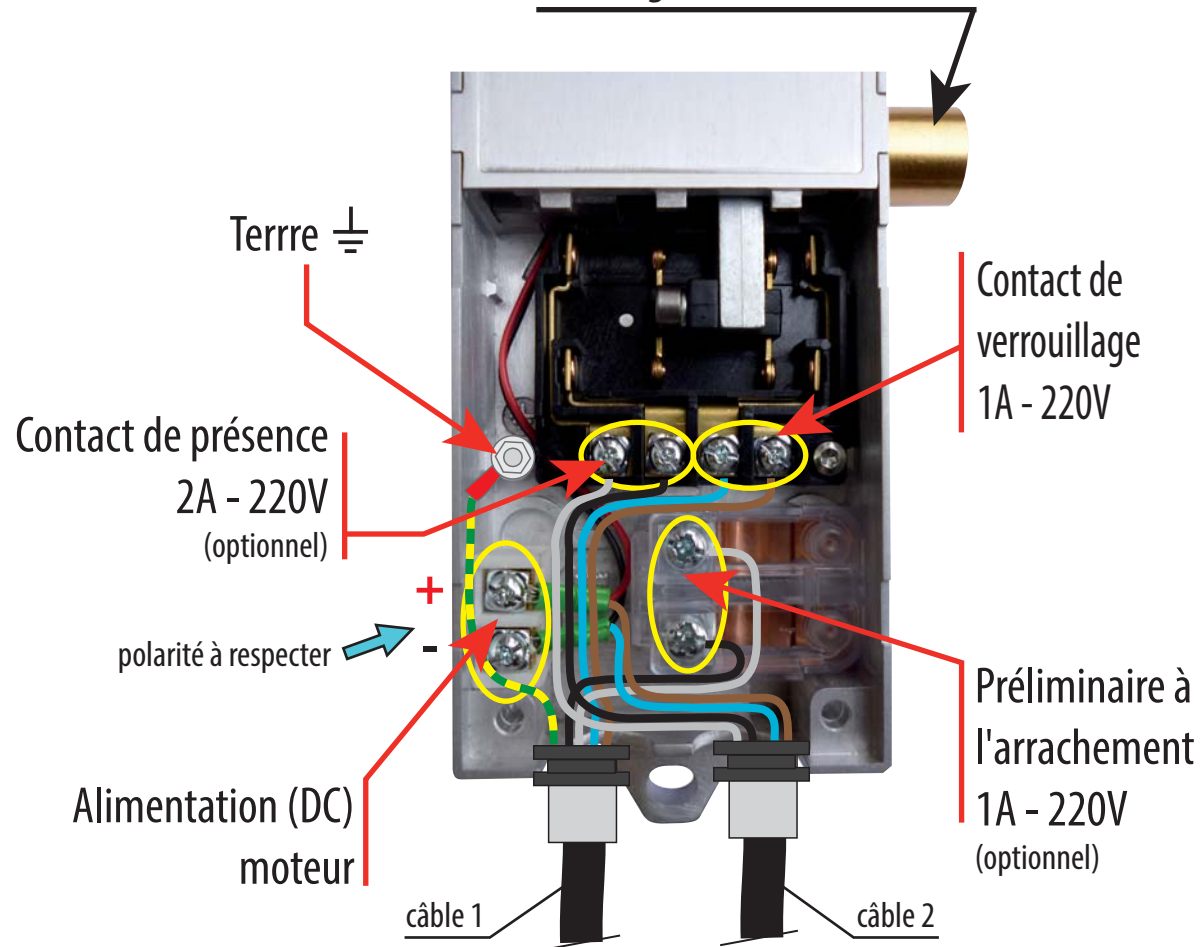

### Raccordement des contacts électriques (précablage prudhomme S.a)

#### Câble 1

bleu } contact de verrouillage  
brun }  
gris } contact préliminaire  
noir }

verre/jaune : Terre

#### Câble 2 (côté pêne)


(+) = rouge = brun } moteur  
(-) = noir = bleu }  
gris } contact de présence  
noir }



#### Serrure Gauche



#### Serrure Droite

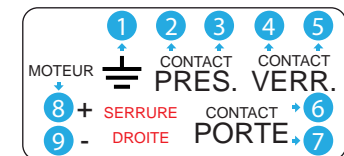


# Serrures LRCE

## Principe d'installation

### RCD 180 :


Inter. positif pour serr. à sécurité positive LR128 E ou LR180 E ou LRCE

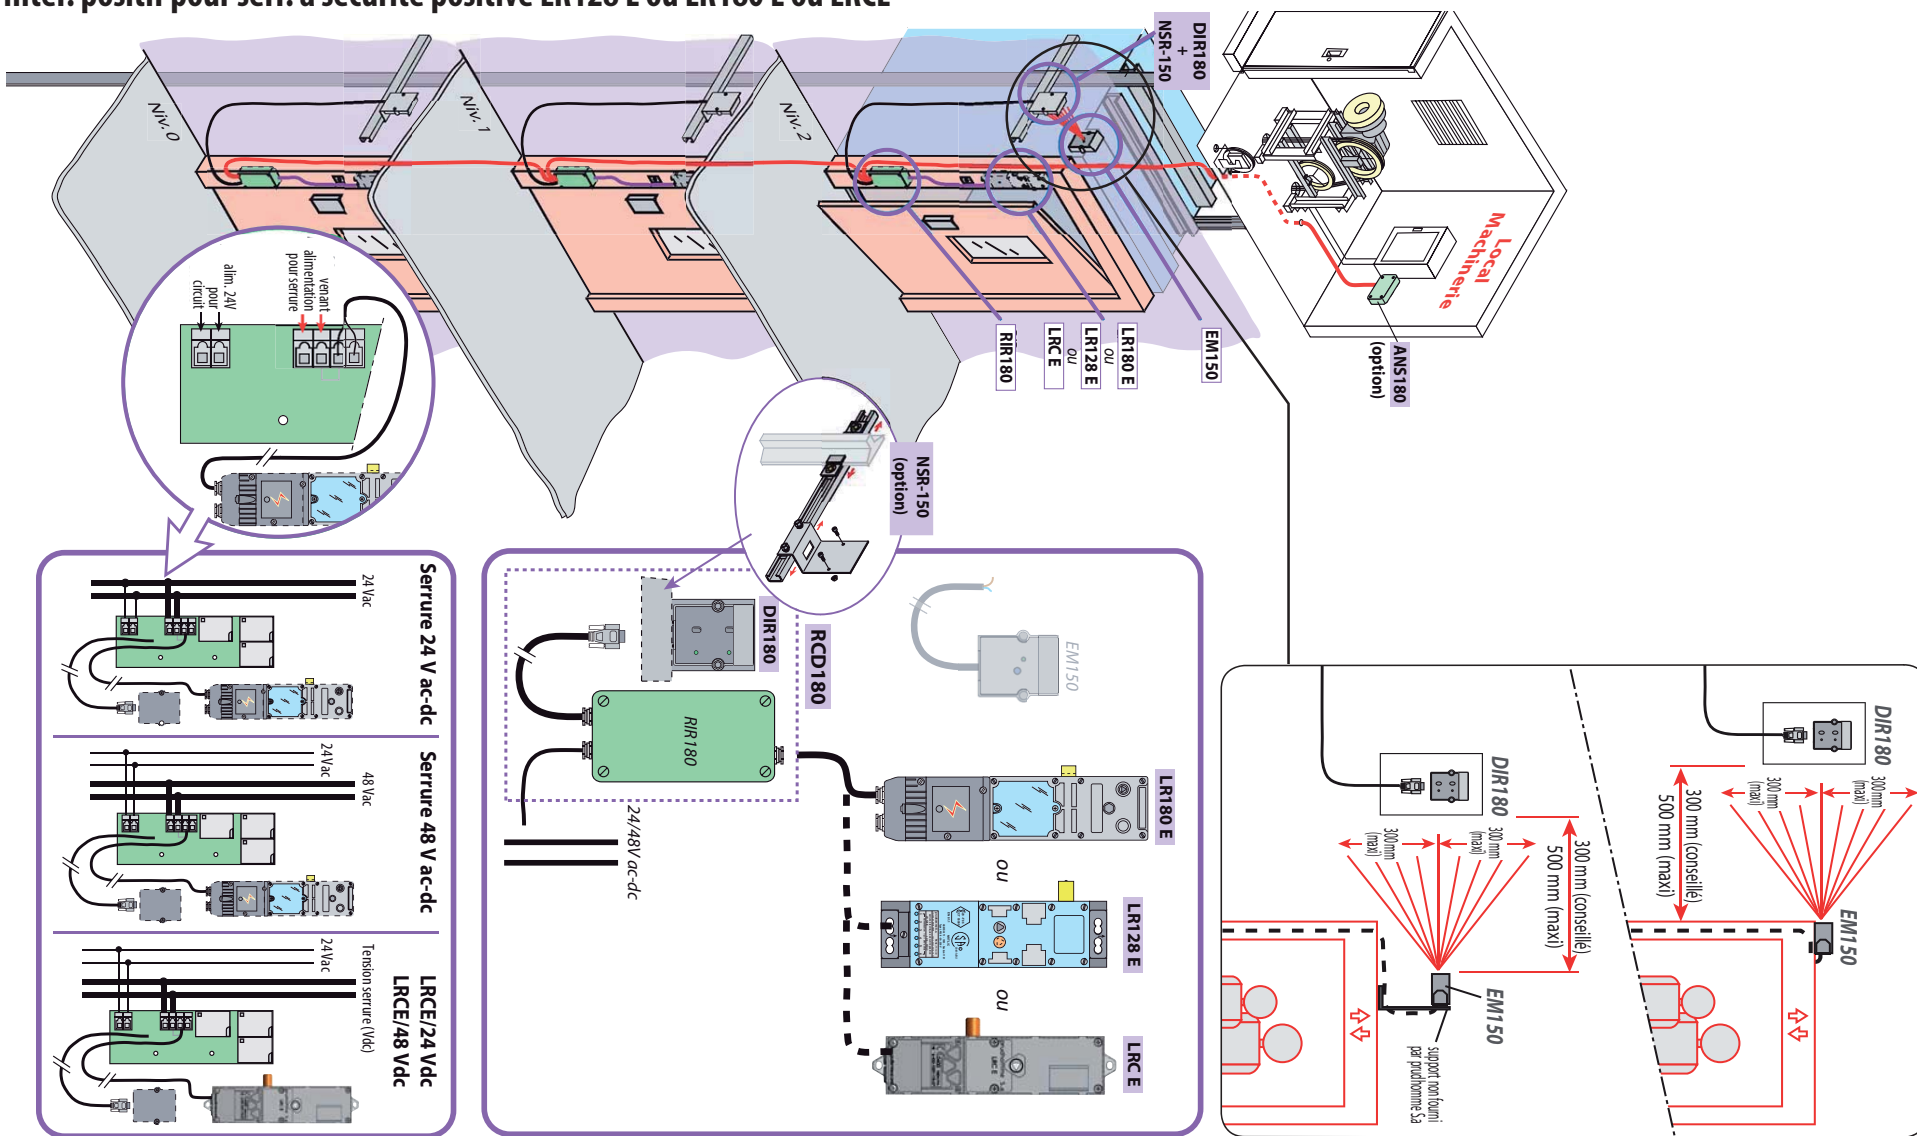


# Serrures LRCE

## Accessoires



réf. **GV-LRC**

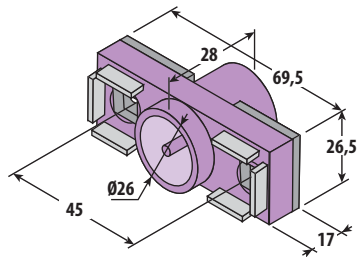


Le réglage s'effectue sur les 2 écrous prisonniers pour la fixation

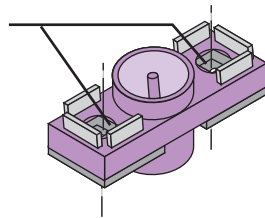


### Installation de la gache GV-LRC

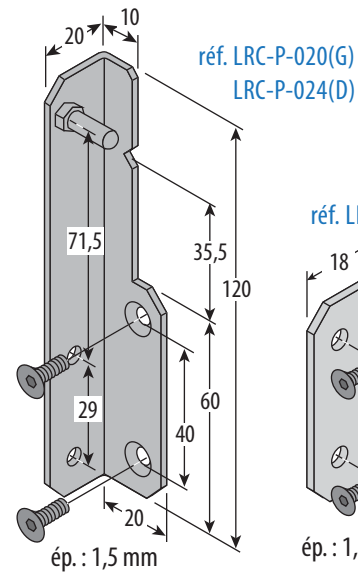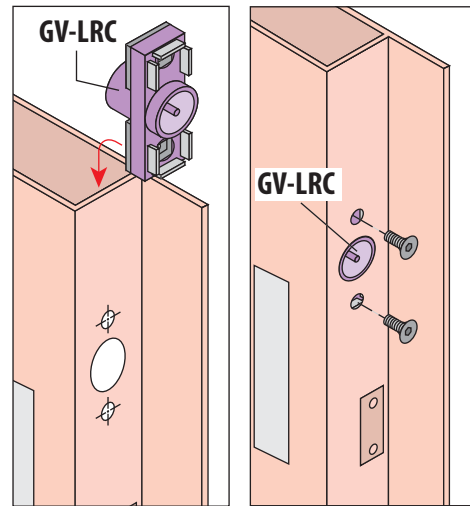




réf. **LRC-P-026**

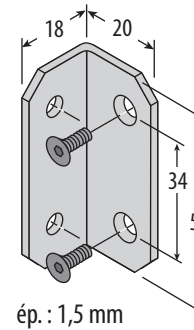

réf. **SHD21**




### Installation de la gache GVR-LRC

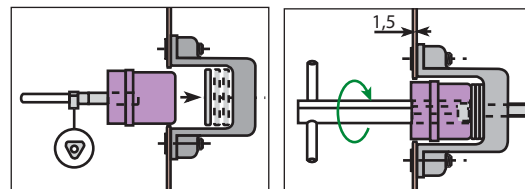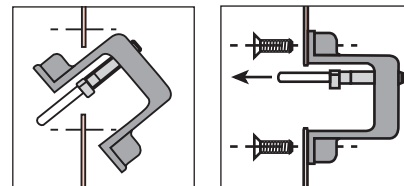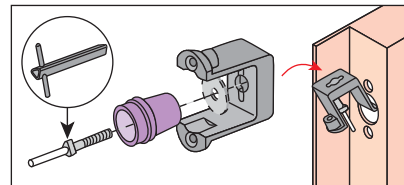


### Réglage de la gache GVR-LRC

Réglage de la gache s'effectue à l'aide de la clé triangle

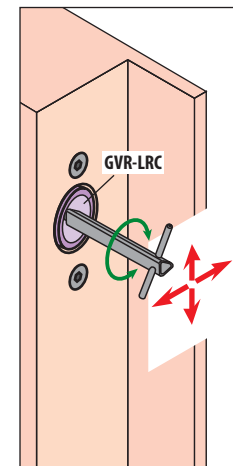

réf. **GVR-LRC**

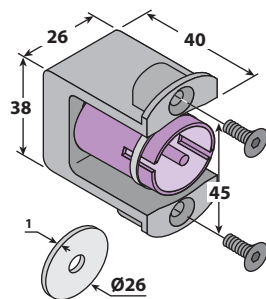

réf. **LL6**

DECLARATION UE DE CONFORMITE POUR COMPOSANTS DE SECURITE  
EU DECLARATION OF CONFORMITY FOR SAFETY COMPONENTS  
ERKLARUNG ZUR EU ÜBEREINSTIMMUNG VON SICHERHEIT KOMPONENTEN

Nom et adresse du fabricant et du détenteur de la déclaration :

*Manufacturers' and holder's*

*Certificate name and address :*

*Name und adresse von Hersteller und Erklärung besitzer :*

**prudhomme S.a**

38, rue Charles de Gaulle

94140 Alfortville

(FRANCE)



Catégorie, type et marque de fabrique ou de commerce :

*Category, type and make or Trade name :*

*Kategorie, Typ und Fabrik-oder Handelsmarke :*

- Serrure d'ascenseurs à sécurité positive type LRC 260 & LRC E pour porte battante ou coulissante 1 vantail

- Positive safety lock type LRC 260 & LRC E for simple hinged or sliding doors

- Positiv sicherheit Türverschluss LRC260 & LRC E für Schwenk oder Schiebetür

Année de fabrication :

*Years of manufacture :*

*Baujahr :*

**2023**

Nom et adresse et numero de référence de l'organisme notifié :

Name, address and reference number of the notified organism :

Name, Adresse und Referenz-Nummer von der deklarierten Instanz :

**LIFTINSTITUUT B.V.**

Buikslotermeerplein 381

1025 XE - P.O. Box 36027

1020 MA - AMSTERDAM

**N° 0400**

Attestation de type :

Type Examination Certificate :

Art der Bescheinigung :

Ce composant a obtenu l'attestation d'examen CE de type NL 16-400-1002-125-07, Rev01, Rev.2, délivré par le LIFTINSTITUUT B.V.

The component is declared in conformity with the EC type NL 16-400-1002-125-07, Rev01, Rev.2, delivered by the LIFTINSTITUUT B.V.

Diese Komponente hat die Bescheinigung EG NL 16-400-1002-125-07, Rev01, Rev.2, erhalten.

Nom et adresse et numero de référence de l'organisme notifié pour la validation du système d'assurance qualité production :

*Name, address and reference number of the notified organism for the validation of the quality insurance system :*

*Name, Adresse und Referenz-Nummer von der deklarierten Instanz / für die Erklärung des Qualitäts-Versicherungs-Systems :*

**Bureau Veritas**

67-71, Boulevard du Château

92200 Neuilly sur seine - France

**N° 2681-LD-VI-PR2 001-17-FRA (Annexe VI)**

Norme :

Standard :

Norm :

Ce composant répond à la Directive ascenseur : 2014/33/UE

Ce composant répond à la norme : EN 81-1/2: 1998 + A3: 2009 ainsi qu'à la EN 81-20/50: 2020

*This component meets the Lift Directive 2014/33/UE*

*This component meets the standard: EN 81-1/2: 1998 + A3: 2009 as well as EN 81-20/50: 2020*

*Diese Komponente entspricht der Richtlinie Aufzug 2014/33/UE*

*Diese Komponente erfüllt die Norm: EN 81-1/2: 1998 + A3: 2009 sowie EN 81-20/50: 2020*

Roland TRICOT

Directeur Général

General Manager / CEO

Date : 22-1-2023

Lieu : Paris FRANCE

**DECLARATION UE DE CONFORMITE POUR COMPOSANTS DE SECURITE**  
**DECLARACIÓN DE CONFORMIDAD UE PARA COMPONENTES DE SEGURIDAD**  
**DICHIARAZIONE DI CONFORMITÀ UE PER COMPONENTI DI SICUREZZA**  
**DECLARAÇÃO UE DE CONFORMIDADE PARA COMPONENTES DE SEGURANÇA**

Nom et adresse du fabricant et du détenteur de la déclaration :  
Nombre y dirección del fabricante y del titular de la declaración :  
Nome e indirizzo del fabbricante e del titolare della dichiarazione :  
Nome e morada do fabricante e do detentor da declaração :

**prudhomme S.a**  
38, rue Charles de Gaulle  
94140 Alfortville  
(FRANCE)



Catégorie, type et marque de fabrique ou de commerce :

- Serrure d'ascenseurs à sécurité positive type LRC 260 & LRC E pour porte battante ou coulissante 1 vantail

Categoría, tipo y marca de fábrica o de comercio :

- Cerradura de seguridad positiva tipo LRC 260 & LRC E para puerta batiente o corredera

Categoria, tipo e marchio di fabbrica o nome commerciale :

- Serratura di ascensori a sicurezza positiva tipo LRC 260 & LRC E per porta battente o scorrevole 1 stoffa per tendin

Categoria, tipo e marca de fabrico ou comercial :

- Fechadura de ascensoresde segurança positiva tipo LRC 260 & LRC E para porta de tipo batente o correção 1 batente

Année de fabrication :

**2023**

Año de fabricación :

Anno di fabbricazione :

Ano de fabrico :

Nom et adresse et numero de référence de l'organisme notifié :

**LIFTINSTITUUT B.V.**

Nombre y dirección y número de referencia del organismo notificado :

Buikslotermeerplein 381

1025 XE - P.O. Box 36027

1020 MA - AMSTERDAM

Nome ed indirizzo e numero di riferimento dell'organismo notificato :

**N° 0400**

Nome e endereço e número de referência do organismo notificado :

Attestation de type :

Ce composant a obtenu l'attestation d'examen CE de type NL 16-400-1002-125-07, Rev01, Rev.2, délivré par le LIFTINSTITUUT B.V.

Certificado de tipo :

Este componente ha obtenido el certificado de examen CE de tipo NL 16-400-1002-125-07, Rev01, Rev.2, expedido por el LIFTINSTITUUT B.V.

Attestazione di tipo :

Questo componente ha ottenuto l'attestazione di conformità CE di tipo NL 16-400-1002-125-07, Rev01, Rev.2, rilasciata da LIFTINSTITUT B.V.

Certificado de Exame de tipo :

Este componente obteve o certificado de exame CE de tipo NL 16-400-1002-125-07, Rev01, Rev.2, fornecido pelo LIFTINSTITUUT B.V.

Nom et adresse et numero de référence de l'organisme notifié pour la validation du système d'assurance qualité production :

**Bureau Veritas**

67-71, Boulevard du Château

92200 Neuilly sur seine - France

Nombre y dirección y número de referencia del organismo notificado para la validación del sistema de garantía de calidad :

**N° 2681-LD-VI-PR2 001-17-FRA (Annexe VI)**

Nome ed indirizzo e numero di riferimento dell'organismo notificato per la convalida del sistema d'assicurazione qualità :

Nome e endereço e número de referência do organismo notificado para a validação do sistema de seguro qualidade :

Norme :

Ce composant répond à la Directive ascenseur : 2014/33/UE

Norma :

Ce composant répond à la norme : EN 81-1/2: 1998 + A3: 2009 ainsi qu'à la EN 81-20/50: 2020

Roland TRICOT

Directeur Général

Director General

Director-Geral

Date :

22-1-2023

Lieu :

Paris FRANCE

Este componente responde a la Directiva Ascensor 2014/33/UE

Este componente se encuentra con la norma EN 81-1/2: 1998 + A3: 2009, así como con la norma EN 81-20/50 2020

Questo componente a conforme alla Direttiva Ascensori 2014/33/UE

Questo componente è conforme alla norma EN 81-1/2: 1998 + A3: 2009, nonché alla EN 81-20/50 2020

Este componente cumpre a directiva elevador: 2014/33/UE

Este componente cumpre a norma: EN 81-1/2: 1998 + A3: 2009, bem como a EN 81-20/50 2020





liftinstituut  
SINCE 1933



# EU-TYPE EXAMINATION CERTIFICATE

Issued by Liftinstituut B.V.  
identification number Notified Body 0400,  
commissioned by Decree no. 2022-0000107366

Certificate no. : NL16-400-1002-125-07 Revision no.: 2

Description of the product : Compact door locking device for manually operated hinged landing doors

Trademark : Prudhomme S.a.

Type no. : LRC 260 & LRC E

Name and address of the manufacturer : Prudhomme S.a.  
38 rue Charles de Gaulle  
94140 Alfortville  
France

Name and address of the certificate holder : Prudhomme S.a.  
38 rue Charles de Gaulle  
94140 Alfortville  
France

Certificate issued on the following requirements : Lifts Directive 2014/33/EU

Certificate based on the following standard : Parts of: EN 81-20:2020, EN 81-50:2020

Test laboratory : None

Date and number of the laboratory report : None

Date of EU-type examination : January 2023

Additional document with this certificate : Report belonging to the EU-type examination certificate no.: NL16-400-1002-125-07 Rev.2

Additional remarks : Max. rated voltage 250 VAC  
Max. rated current 2,0 A  
Furthermore see chapter 5 of the report belonging to this EU-type examination certificate.  
This revision replaces certificate NL16-400-1002-125-07 Rev.1 of 19-04-2018

Conclusion : The safety component meets the requirements of the Lifts Directive 2014/33/EU taking into account any additional remarks mentioned above.

Certification decision by

W.G. Kasteleijn  
Product Manager Certification

Amsterdam

Date : 16-01-2023

Valid until : 16-01-2028



liftinstituut  
SINCE 1933



## Report EU-type examination

Report belonging to EU-type examination certificate number	: NL16-400-1002-125-07
Date of issue of original certificate	: February 14, 2017
Certificate applies to	: Safety component
Revision number / date	: 2 / January 16, 2023
Requirements	: Lifts Directive 2014/33/EU Standards: EN81-20:2020, EN81-50:2020
Project number	: P220386

### 1. General specifications

Description of the product	: Compact door locking device for swing doors
Trademark	: Prudhomme S.a.
Type no.	: LRC 260 & LRC E
Name and address of the manufacturer	: Prudhomme S.a. 38 rue Charles de Gaulle 94140 Alfortville, France
Laboratory	: None
Address of examined component	: Liftinstituut, Amsterdam, The Netherlands
Date of examination	: January 2023
Examination performed by	: M. Issa

### 2. Description safety component

The LRC 260 compact locking device can be used for hinged landing doors and is equipped with a lateral lever (LG), a perpendicular lever (PG), a Bowden cable operation (CG) or any outside lever operation (LkG, C1G). The difference between these versions of the locking devices is the way of operating the rod that is connected to the locking pin.



The LRC E compact locking device can be used for hinged landing doors and is operated electrically, without a mechanical lever. A motor is operating the locking pin. Opening movement of the locking pin is limited by a switch inside the housing that reduces the motor current to a holding current.

The locking takes place by a pin, with an inclined part, in a hole in the side of the landing door. The locking pin can be located on either side of the locking housing.

Actual locking is performed by a guided spring, moving the locking pin outwards.

There are two types of internal mechanism and corresponding locking pins, which slightly differ:

-Inside the housing a checking pin is provided to check if the landing door is properly closed. If the pin gets stuck the door lock contact won't close, or

-Inside the locking pin a checking pin is provided to check if the landing door is properly closed. If the pin gets stuck the door lock contact won't close.

The housing of the lock is made from die-cast. The top side is fitted with a partially transparent cover, so contacts and locking components can be inspected without removing any covers.

Also is it possible to open both lock types by means of a triangular key according Fig. 13 of EN81-20 from the landing side. The LRC E lock can also be opened from the well side by the triangular key.

The used locking contact is the following:

Manufacturer	Prudhomme S.a.
U <sub>e</sub> / I <sub>e</sub>	250 VAC / 2,0 A AC

For LRC E the following motor can be used:

Manufacturer	Prudhomme S.a.
U <sub>e</sub> / I <sub>e</sub> / Holding Current	12-24-48 VDC / 0,2-0,15-0,15 ADC

See annex 1 for a general overview of the product

### 3. Examinations and tests

The examination covered a check whether compliance with the Lift Directive 2014/33/EU is met, based on the harmonized product standards EN 81-20:2020 and EN 81-50:2020.

The examination included:

- Examination of the technical file (See annex 2):
- Examination of the representative model in order to establish conformity with the technical file.
- Inspections and tests to check compliance with the requirements.



The tests which are performed are as stated in clause 5.2 of EN 81-50.  
The mechanical and electrical tests are performed on the LRC-E-015 locking device. This is a locking device with the checking pin integrated in the locking pin and has a perpendicular unlocking arm.  
Additionally, only mechanical tests are performed on the LRC-E-030 locking device. This is a locking device with the checking pin in the back side of the lock housing and has a lateral unlocking arm.  
For all different subtypes the locking contact and its operation by internal mechanism is identical.

### 3.1 Mechanical tests

#### Endurance test

According clause 5.2.2.2.2 of EN 81-50 an endurance test must be made. For this test a special testing apparatus was designed. With 60.0 rpm the actuator rod was driven. A mechanical counter was installed to keep track of the number of cycles.

#### **Test details for LRC-E-015**

Start date / time            January 26<sup>th</sup>, 2017 / 14:15  
End date / time             February 07<sup>th</sup>, 2017 / 15:00  
Number of cycles            >1.000.000

**Test result: OK**

#### **Test details for LRC-E-030**

Start date / time            January 25<sup>th</sup>, 2017 / 09:00  
End date / time             February 7<sup>th</sup>, 2017 / 05:15  
Number of cycles            >1.000.000

**Test result: OK**

#### Static test

According clause 5.2.2.2.3 of EN 81-50 a static test must be made. To perform the static test a weight was linked to the locking pin. Because the difference between both locking pins, this test was performed on both locking devices.

#### **Test details for LRC-E-015**

Test date                     February 09<sup>th</sup>, 2017  
Test weight                  3000N increasing progressively for 300 seconds.

**Test result: OK**

#### **Test details for LRC-E-030**

Test date                     February 09<sup>th</sup>, 2017  
Test weight                  3000N increasing progressively for 300 seconds.



**liftinstituut**  
SINCE 1933



**Test result: OK**

#### Dynamic test

According to clause 5.2.2.2.4 of EN 81-50 a dynamic test must be made. To perform the dynamic test a block was dropped on the locking pin. The dropping distance was 50 cm. Because the difference between both locking pins, this test was performed on both locking devices.

#### **Test details for LRC-E-015**

Test date February 09<sup>th</sup>, 2017  
Test weight 4 kg  
Dropping distance 50 cm

**Test result: OK**

#### **Test details for LRC-E-030**

Test date February 09<sup>th</sup>, 2017  
Test weight 4 kg  
Dropping distance 50 cm

**Test result: OK**

### 3.2 Electrical tests

#### Endurance test

The locking contact was tested during the endurance test of LRC-E-015. The contact was connected to a resistive circuit.

#### **Test details for locking contact**

Number of cycles 1037330  
Test voltage  $1,0 \times U_e = 250 \text{ V}$   
Test current  $2,0 \times I_e = 4.0 \text{ A}$

**Test Result: OK**

#### Test of ability to break circuit

In accordance with 60947-5-1 a circuit was made with a resistor and choke in series.

#### **Test details for locking contact**

Test voltage  $1,1 \times U_e = 275 \text{ VAC}$   
Test current  $11 \times I_e = 22,0 \text{ A}$   
Cos  $\varphi$   $0,7 = 45^\circ$   
Number of cycles 50 at 6-12 rpm

**Test Result: OK**



#### Test to determine degree of Protection

According to clause 5.11.2.2.1 of EN 81-20 the degree of protection must be IP4X. The clearance shall be at least 3 mm, the creepage distances at least 4 mm and the distances for breaking contacts at least 4 mm after separation.

**Test result: OK**

#### Examination of clearances and creepage distances

According to clause 5.11.2.2.4 of EN 81-20 the clearance shall be at least 3 mm, the creepage distances at least 4 mm and the distances for breaking contacts at least 4 mm after separation.

**Test result: OK**

#### Test for resistance of leakage currents

This test is not performed but based on the values from prior tests made by the manufacturers supplier these values go beyond the requirements of the EN81-50, clause 5.2.2.4.3. The CTI value for Lexan 940A, that is used for the transparent cover, is 225. The CTI value for Lexan 500R, that is used for the locking contact isolator, is 175. The minimum value requested according to the mentioned clause is 175. Also different literature confirm these values.

#### Revision 1: adding the LRC E locking device:

The tests which are performed are as stated in clause 5.2 of EN 81-50.

The mechanical and electrical tests are performed on the LRC-E-049 locking device.

This is a locking device with the checking pin in the back side of the lock housing and has a 24 VDC unlocking motor.

Additionally, only mechanical tests are performed on the LRC-E-067 locking device.

This is a locking device with the checking pin integrated in the locking pin and has a 24 VDC unlocking motor. The locking pin has an additional length of 35 mm.

For all different subtypes the locking contact and its operation by internal mechanism is identical.

### 3.1 Mechanical tests

#### Endurance test

According clause 5.2.2.2.2 of EN 81-50 an endurance test must be made. For this test a special testing apparatus was designed. With 60.0 rpm the actuator rod was driven. A mechanical counter was installed to keep track of the number of complete cycles.

#### **Test details for LRC-E-049**

Start date / time	April 5 <sup>th</sup> , 2018 / 13:50
End date / time	April 17 <sup>th</sup> , 2018 / 12:20
Number of cycles	>1.000.000



**liftinstituut**  
SINCE 1933



**Test result: OK**

**Test details for LRC-E-067**

Start date / time            April 5<sup>th</sup>, 2018 / 09:15  
End date / time             April 19<sup>th</sup>, 2018 / 07:00  
Number of cycles            >1.000.000

**Test result: OK**

Static test

According to clause 5.2.2.2.3 of EN 81-50 a static test must be made. To perform the static test a weight was linked to the locking pin. Because the difference between both locking pins, this test was performed on both locking devices.

**Test details for LRC-E-049**

Test date                     April 19<sup>th</sup>, 2018  
Test weight                  3000N increasing progressively for 300 seconds.

**Test result: OK**

**Test details for LRC-E-067**

Test date                     April 19<sup>th</sup>, 2018  
Test weight                  3000N increasing progressively for 300 seconds.

**Test result: OK**

Dynamic test

According to clause 5.2.2.2.4 of EN 81-50 a dynamic test must be made. To perform the dynamic test a block was dropped on the locking pin. The dropping distance was 50 cm. Because the difference between both locking pins, this test was performed on both locking devices.

**Test details for LRC-E-049**

Test date                     April 19<sup>th</sup>, 2018  
Test weight                  4 kg  
Dropping distance         50 cm

**Test result: OK**

**Test details for LRC-E-067**

Test date                     April 19<sup>th</sup>, 2018  
Test weight                  4 kg  
Dropping distance         50 cm

**Test result: OK**



### 3.2 Electrical tests

#### Endurance test,

The locking contact was tested during the endurance test of LRC-E-049.  
The contact was connected to a resistive circuit.

#### **Test details for locking contact**

Number of cycles            1000100  
Test voltage                 $1,0 \times U_e = 250 \text{ V}$   
Test current                 $2,0 \times I_e = 4.0 \text{ A}$

**Test Result: OK**

#### Test of ability to break circuit

In accordance with 60947-5-1 a circuit was made with a resistor and choke in series.

#### **Test details for locking contact**

Test voltage                 $1,1 \times U_e = 275 \text{ VAC}$   
Test current                 $11 \times I_e = 22,0 \text{ A}$   
Cos  $\varphi$                        $0,7 = 45^\circ$   
Number of cycles            50 at 6-12 rpm

**Test Result: OK**

## 4. Results

After the final examination the product and the technical file were found in accordance with the requirements. The functional tests passed without remarks.

## 5. Conditions

Additional to or in deviation of the applicable demands in the considered requirements / standards (see certificate and/or page 1 of this report), the following conditions shall be taken into account:

- The door lock shall be used for swing doors only.
- The door locking device shall be applied within rated current and voltage  
2.0 A / 250 VAC
- The installation and maintenance instructions shall be provided with the lock.
- Max. door gap at locking side shall be 12.0 mm and 15.5 mm for the locks with long bolts.





liftinstituut  
SINCE 1933



- Locking distance before making contact must be at least 7 mm.
- The position of the unlocking triangle shall be according to clause 5.3.9.3.2 of EN 81-20.
- The position of the LRC E door lock at the bottom landing door shall be such, that the requirements of clause 5.3.9.3.5 of EN81-20 are met.
- For the LRC E locking device it shall be ensured by mechanically forced interlocked switches (safety contacts) or by the lift control unit with safety circuit comprising two channels, that only the landing door is being unlocked behind of which the car is positioned (unlocking zone).

## 6. Conclusions

Based upon the results of the EU-type examination Liftinstituut B.V. issues an EU-type examination certificate.

The EU-type examination certificate is only valid for products which are in conformity with the same specifications as the type certified product. The certificate is issued based on the requirements that are valid at the date of issue. In case of changes of the product specifications, changes in the requirements or changes in the state of the art the certificate holder shall request Liftinstituut B.V. to reconsider the validity of the certificate.



liftinstituut  
SINCE 1933



## 7. CE marking and EU Declaration of conformity

Every safety component that is placed on the market in complete conformity with the examined type must be provided with a CE marking according to article 18 of the Lift directive 2014/33/EU under consideration that conformity with eventually other applicable Directives is proven. Also every safety component must be accompanied by an EU declaration of conformity according to annex II of the Directive in which the name, address and Notified Body identification number of Liftinstituut B.V. must be included as well as the number of the EU-type examination certificate.

An EU type-certified safety component shall be random checked e.g. according to annex IX of the Lift directive 2014/33/EU before these safety components may be CE-marked and may be placed on the market. For further information see regulation 2.0.1 'Regulations for product certification' on [www.liftinstituut.com](http://www.liftinstituut.com).

Prepared by:

Mohamed Issa  
Product Specialist Certification

Certification decision by:

W.G. Kasteleijn  
Product Manager Certification




liftinstituut  
SINCE 1933




## Annexes

### Annex 1.a Door locking device LRC260/PG (E-014)

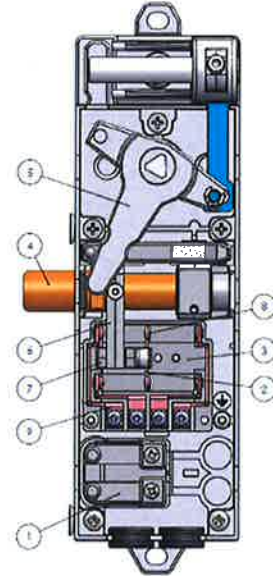


### Annex 1b : Door locking LRC260/PG (E-015)

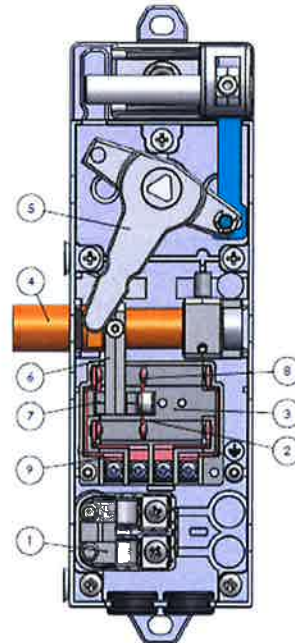




Annex 1c : Door locking LRC260/LG (E-030)

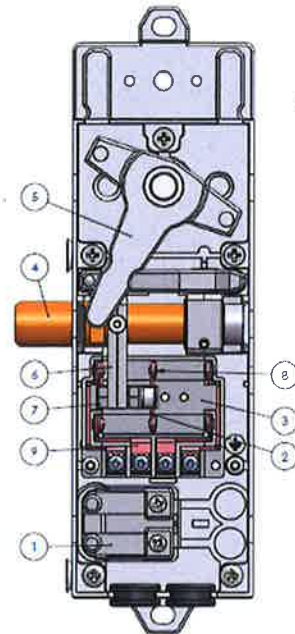

Annex 1d : Door locking LRC260/LG (E-031)

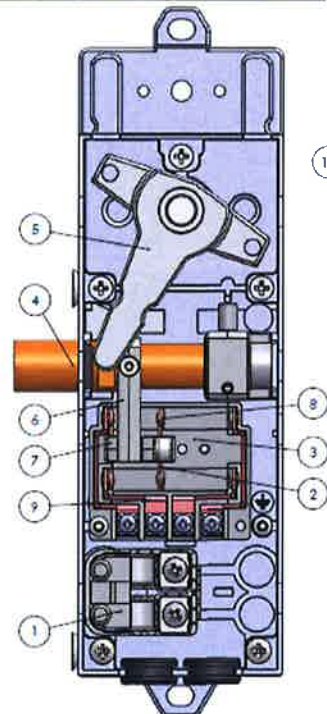








liftinstituut  
SINCE 1933



Annex 1g : Door locking LRC260/LcK (E-047)

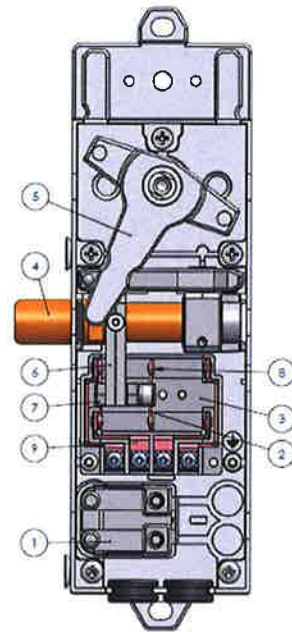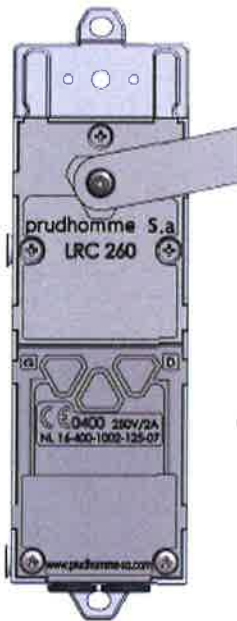

Annex 1h : Door locking LRC260/C1G (E-048)

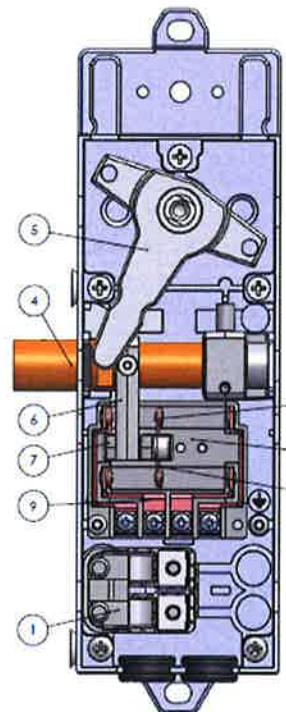





liftinstituut  
SINCE 1933



Annex 1i : Door locking device LRC E (E-049)

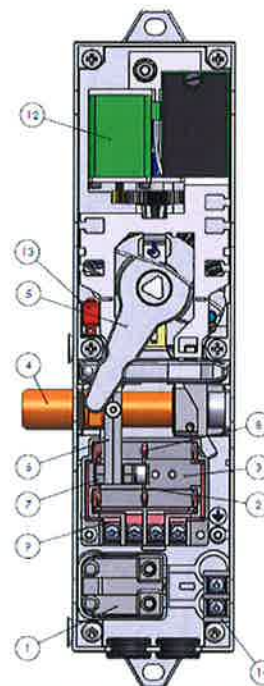


Annex 1j : Door locking LRC E (E-054)

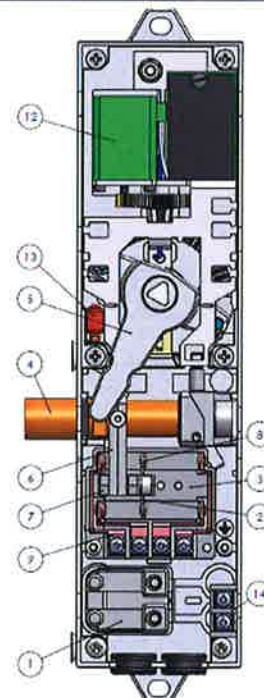




Annex 1k : Door locking LRC E (E-067) (Long Bolt)

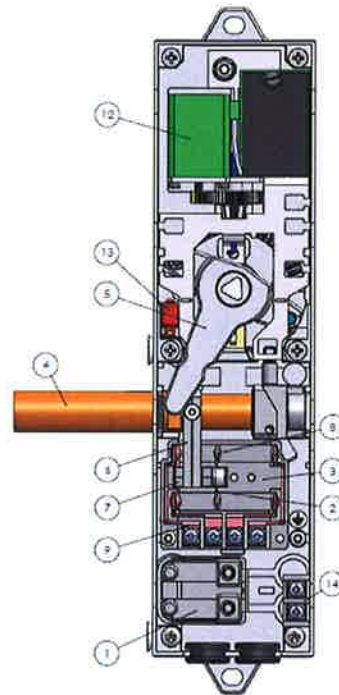


Annex 1l : Checking pin at back of housing

Bolt in support on the hook's 1st notch

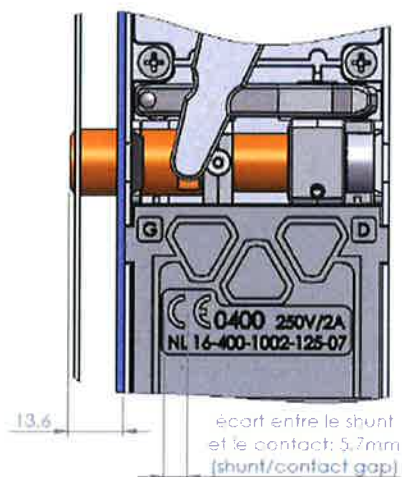


Bolt in support on the hook's 2nd notch

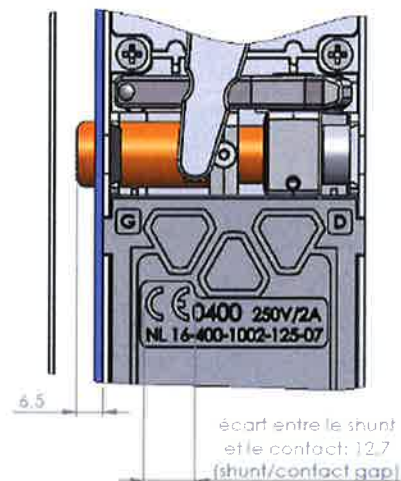






Annex 1m : Checking pin integrated in locking pin

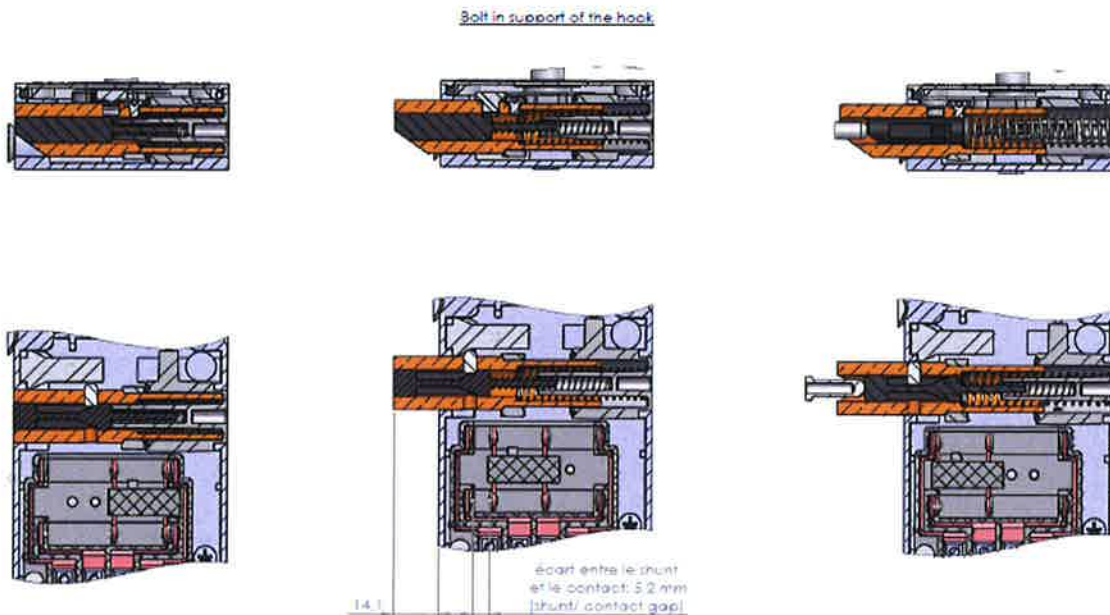

Annex 1n : Checking pin integrated in locking pin, long bolt

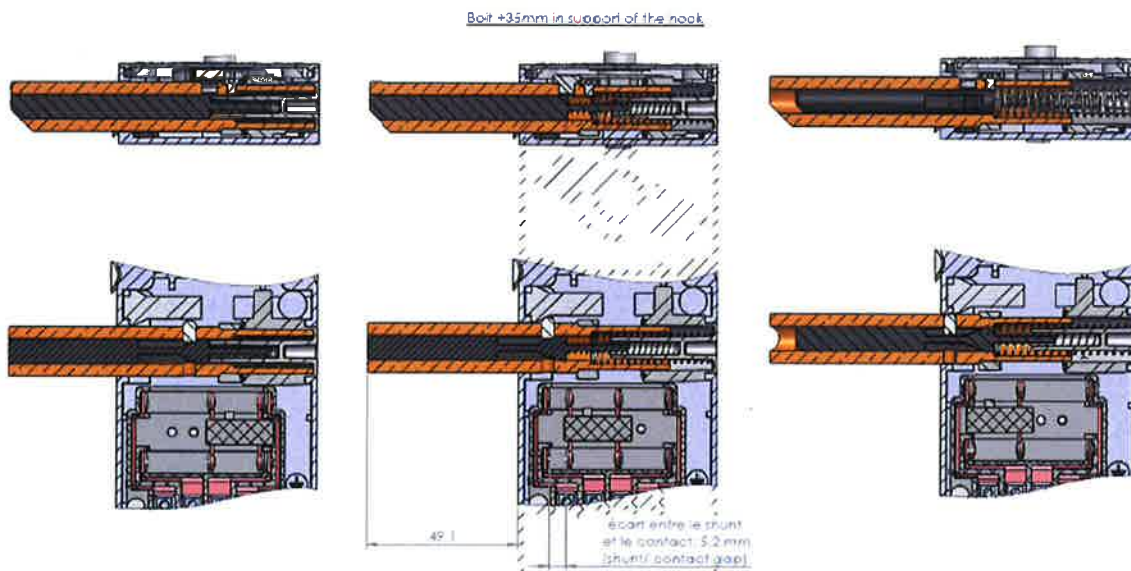



**Annex 2. Documents of the Technical File which were subject of the examination**

Title	document number	date
LRC260-PG	LRC-E-014	28-10-2016
LRC260-PG	LRC-E-015	20-04-2016
LRC260-LG	LRC-E-030	26-10-2016
LRC260-LG	LRC-E-031	20-04-2016
LRC260-CG	LRC-E-045	28-10-2016
LRC260-CG	LRC-E-046	20-04-2016
LRC260-LkG	LRC-E-047	26-10-2016
LRC260-C1G	LRC-E-048	20-04-2016
LRC E Percussion latérale	LRC-E-049	18-01-2018
LRC E Percussion centrale	LRC-E-054	18-01-2018
LRC E Percussion centrale & pêne + 35 mm	LRC-E-067	18-01-2018
Installation manual LRC260	Ver.A	17-02-2017
Installation manual LRCE	Ver.A	25-08-2020

**Annex 3. Reviewed deviations from the standards**

EN xx-x par.	Requirement	Accepted design
x.x.x		

**Annex 4. Revision of the certificate and its report**

Rev.:	Date	Summary of revision
-	14-02-2017	Original
1	19-04-2018	Added LRC E locks
2	16-01-2023	Certification renewal. Standard version updated. Annex 2 updated.

End of report